



FSI
FASTENING SYSTEMS
INTERNATIONAL

PT-4000 Cordless Blind Riveter for CHERRYMAX® & Blind Bolts

POWERFUL

VERSATILE

LIGHTWEIGHT

PRODUCTIVE



Specifications for PT-4000:

Pulling Force:	4,000 lbs.
Stroke:	.787"
Dimensions:	11-7/8" H x 10-3/8" L x 2-5/8" W
Power Source:	3.2 Ah, 12vdc Nickel-Metal (NiMH) Hydride Battery
Charger Source:	120 volt, 60 Hz or 220 volt, 50 Hz
Charger Cycle Time:	30 MINUTES
Operating Temp. Range (ambient):	32 to 120°F
Housing Material:	Impact Resistant Glass Filled Nylon

The New, Higher Capacity PT-4000 Cordless Blind Riveter offers the sheet metal technician capability for installation of most all 1/4" diameter blind rivets while retaining all the features of the PT-3000 with respect to size, weight and versatility.


Falling within the USAF TO-1-1-688, the PT-4000 develops in excess of 4,000 lbs of pulling force over more than 3/4" of stroke. Utilizing the same battery packs and charger as the PT-3000 riveter, the PT-4000 is a logical addition for any organization normally requiring 1/4" diameter blind riveting ability. The standard PT-4000 pulling head assembly (jaw holder, jaws, nose tube) is interchangeable with any of the FSI riveters (D-100, D-700, PT-100, and PT-3000) therefore offering redundancy and reduced spare parts inventory levels.




1206 East Macarthur St. Sonoma, CA 95476 • 800-344-2393 (707) 935-1170 •
 Fax: (707) 935-1828 • www.fsirivet.com • sales@fsirivet.com

PT-4000 (optional) Configurations

Standard Configuration

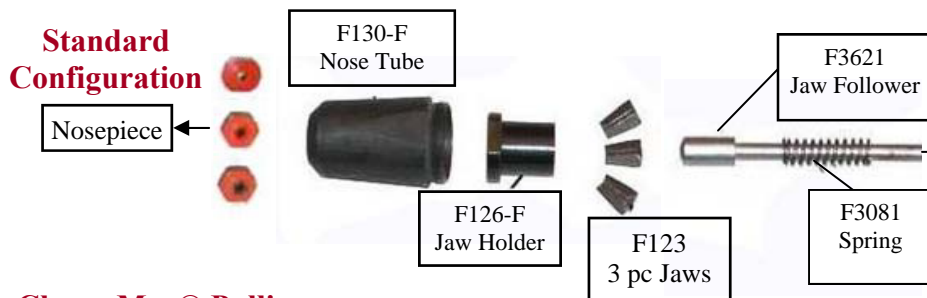


CherryMax® Pulling Head Configuration

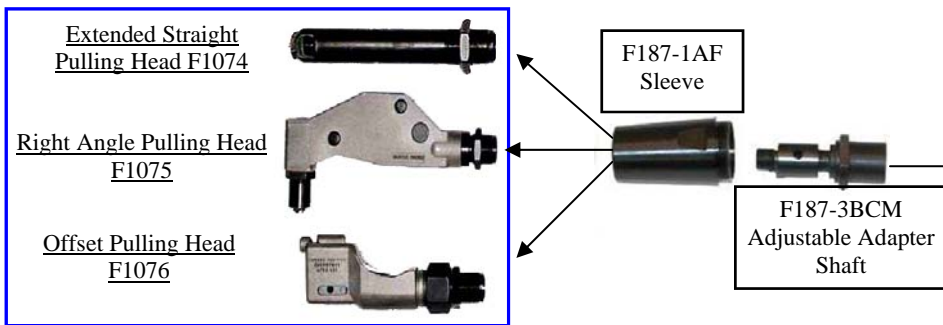


CherryMax® & Pop® Rivets Configuration

*Note: Replace Jaw Follower F3621 with F3245 (see spare parts canister) when installing 1/4" dia. rivets. You may also use the F123 (3pc) jaws for 1/8" thru 1/4" diameter blind rivets.

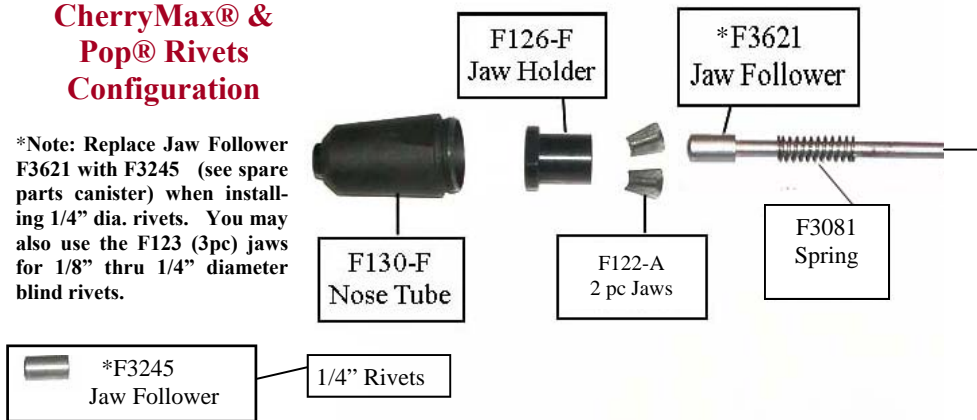

MS90353/54 "U" & "S" Type Blind Bolt Configuration

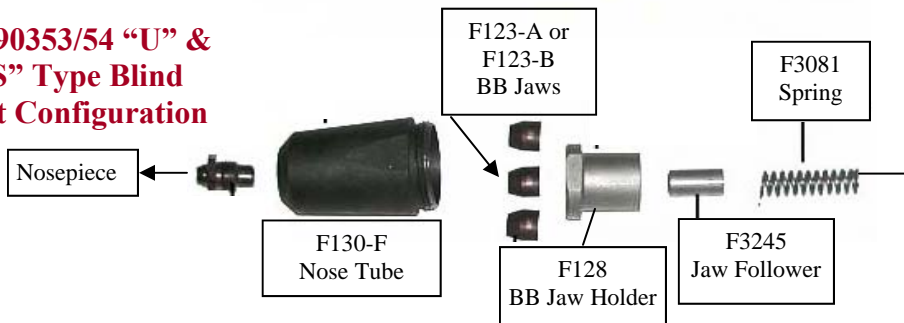

Rivet Types:

Types of rivets installable with the PT-4000 include, but are not limited to, virtually all CherryMax® (M7885), Avdel®, or Cherry Mono-bolts®, Cherry Interlock®, Huck MagnaLok®, and Pop type rivets. The PT-4000 is also capable of installing both 5/32" and 3/16" Blind Bolts (MS90353/54-S/U) with the proper nosepieces (provided in the Mil-1 and MIL-2 kits).

Aerospace and Industrial Sheet Metal
● Applications ●

