

D-700-MIL-4 NSN: 5120-01-430-5325

HAND HYDRAULIC BLIND RIVET TOOL KIT FOR CHERRYMAX® INSTALLATION

POWERFUL

VERSATILE

COMPACT

LIGHTWEIGHT





Made in USA

THE D-700-MIL-4 BLIND RIVET TOOL KIT affords the aerospace/military technician the ability to install a wide variety of high break load blind fasteners with minimal wrist effort. Utilizing a patented, smart power valve system, the D-700C riveter contained in the kit permits installation of most all straight pull, single action blind rivets through 1/4" diameter. The Kit includes four threaded quick change rivet nosepieces for the D-700C riveter which has a unique two piece jaw system which allows the riveter to quickly be adapted to install 3/32" and 1/8" diameter pull thru nut plate rivets, as well as any CherryMax® (NAS9300), Huck Clinch®, Allmax® (M7885), SuperMax®, Cherry SST®, Huck Max® and most CherryMax® "AB" rivets.



Applications


Pulling Head	Rivet	Diameter
 F1782	CherryMax CherryMax "AB" CherryMax SST	-4, -5, -6 -4, -5, -6* -4, -5, -6
 F1075	CherryMax CherryMax "AB" CherryMax SST	-4, -5, -6 -4, -5, -6* -4, -5, -6

*Not Aluminum

Specifications For D-700C Riveter

Stroke: 0.8" (20.3 mm)	Overall Length: 7.5" (190.5 mm)
Pulling Force: 5,000 lbs.	Wrist Effort To
Overall Height: 6.56" (166.6 mm)	3,000 lb. Fastener: 30 lbs.
Overall Width: 2.00" (50.8 mm)	Retract Actions: Single Pushbutton
Weight: 1.95 lbs. (884.5 g)	

P.O. Box 1372
1206 E. MacArthur St.
Sonoma, CA 95476
1-800-344-2393
(707) 935-1170
FAX: (707) 935-1828
CAGE Code: 64878
www.fsirivet.com
Email: sales@fsirivet.com

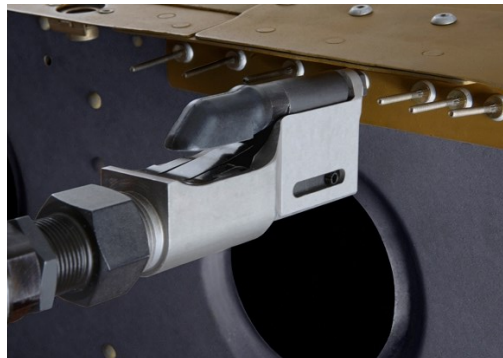

D-700-MIL-4 Kit Contents

QTY.	FSI Part #	Description National Stock #
1	D-700C	Hand Riveter 5120-01-397-6806
1	F1782	Offset Head
1	F1075	Right Angle Head 5120-01-430-5346
1	F187-1AR	Adapter Sleeve Rotating
1	F187-2A	Adapter Puller Shaft
1	F156	Nosepiece, 3/32"
1	F159	Nosepiece, 1/8"
1	F143	Nosepiece, 3/16" 5120-01-430-5344
1	F797	Carrying Case

GSA Contract #
GS-06F-0009L